Exa-Scale FSIO and Archive
Can we get there?
Can we afford to?

09/2011

Gary Grider, LANL

Excerpts from LA-UR 10-04611

Pop Quiz: How Old is this Guy?

U.S. DEPARTMENT OF ENERGY

Potential System Architecture Targets

System attributes	2010	"2015"		"2018"	
System peak	2 Peta	200 Petaflop/sec		1 Exaflop/sec	
Power	6 MW	15 MW		20 MW	
System memory	0.3 PB	5 PB		32-64 PB	
Node performance	125 GF	0.5 TF	7 TF	1 TF	10 TF
Node memory BW	25 GB/s	0.1 TB/sec	1 TB/sec	0.4 TB/sec	4 TB/sec
Node concurrency	12	O(100)	O(1,000)	O(1,000)	O(10,000)
System size (nodes)	18,700	50,000	5,000	1,000,000	100,000
Total Node Interconnect BW	1.5 GB/s	20 GB/sec		200 GB/sec	
MTTI	days	O(1day)		O(1 day)	

Gloom and Doom from 2006

- Petascale computing is coming
  - Orders of magnitude more components
  - **Orders of magnitude more failures**

- **<u>Need raw data for better understanding of failures</u>**

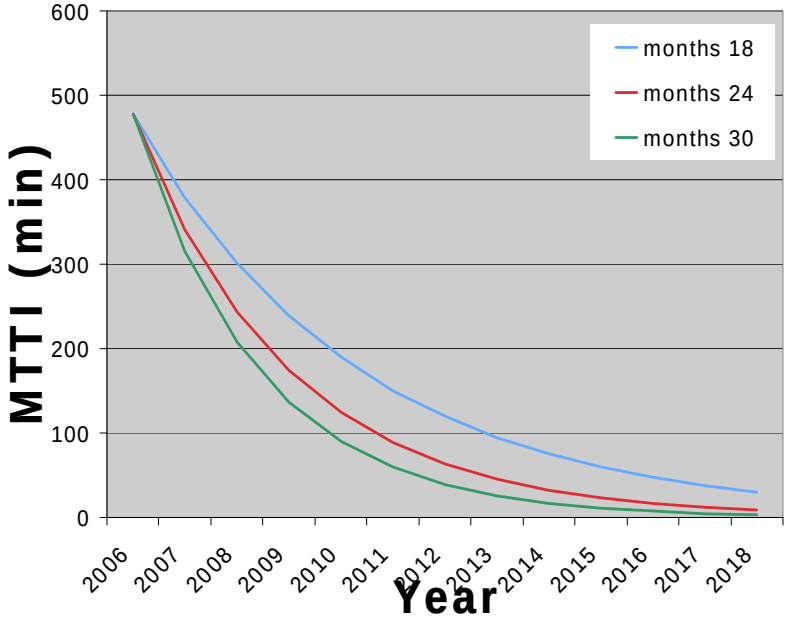

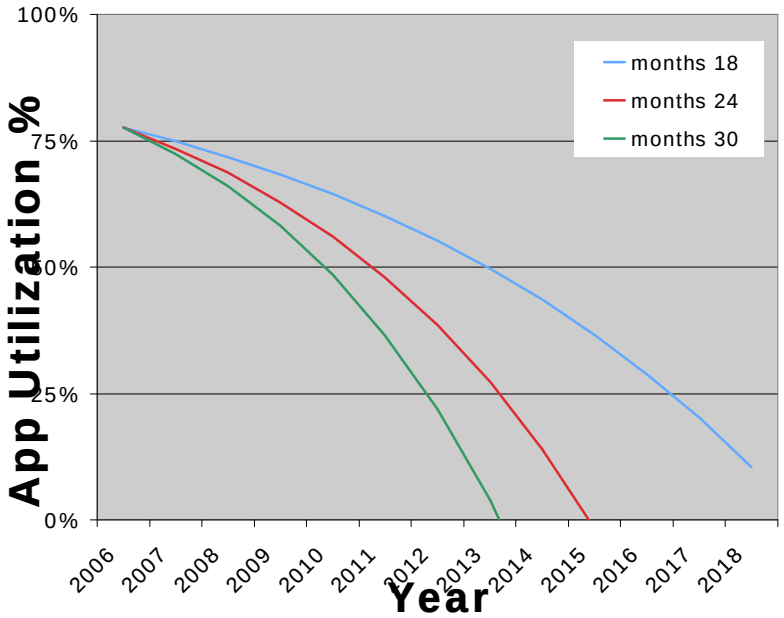

Past and Future Assumptions

- Past
  - All disk
  - Constant ratio of total $ to IO infra $
  - Machines wont accelerate their reliability per flop
- Future
  - Not necessarily all disk
  - Not necessarily same % but close
  - Machines may make accelerate progress on reliability/flop due to integration and industry desire to have constant reliability per socket

Can we do defensive IO at Exascale?

- If we loosen assumptions?
- If we can do it can we afford to do it?

New Assumptions

Year	EF	2010	2012	2014	2016	2018
PF		1.000	20.00	200.00	400.00	1000.00
mem low PB		0.004	0.07	0.72	1.44	3.60
mem med PB		0.020	0.40	4.00	8.00	20.00
mem high PB		0.300	6.00	60.00	120.00	300.00
Num Full Mem Cap		30	30	30	30	30
Size Scratch PB low		0.108	2.16	21.60	43.20	108.00
Size Scratch PB med		0.600	12.00	120.00	240.00	600.00
Size Scratch PB high		9.000	180.00	1800.00	3600.00	9000.00
Time to dump Secs		1200.000	800.00	600.00	400.00	300.00
Ckpt BW low TB/s		0.003	0.09	1.20	3.60	12.00
Ckpt BW med TB/s		0.017	0.50	6.67	20.00	66.67
Ckpt BW high TB/s		0.250	7.50	100.00	300.00	1000.00
Disk Capacity TB		2.000	3.92	7.68	15.06	29.52
Disk Speed MB/s	100	100.000	140.00	196.00	274.40	384.16
IO node thrput GB/s	100	1.000	2.000	4.000	8.000	16.000

Based On

- DARPA Exa Study for machine sizes, mtti, etc. except 20 PB med mem machine and 30 dumps in scratch
- Seagate Disk Capacity/Size/ Pricing/Power (not shown)
- Micron Flash Capacity/Size/ Pricing/Power (not shown)
- 10% of mtti as dump time

I wanted to know – what miracles will we need and to get past what problems.

Status Quo: Use Disk Based Shared Global Parallel File System to Provide Dump Space

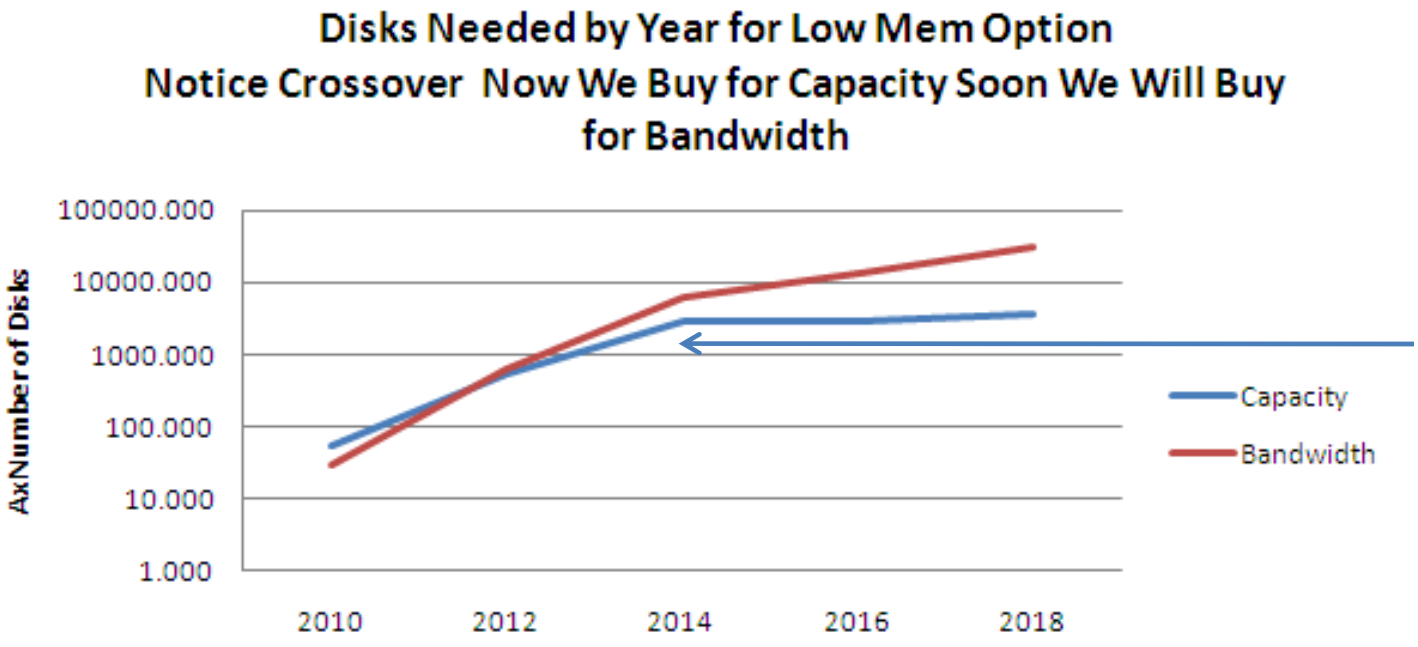

Notice that using these modeling parameters, we finally reach the predicted cross over point of buying disk for BW and not Capacity in 2012

2018 medium memory machine

- 4166 IO nodes, 175k disks
- File System sees 50-100k way parallelism (assumes IOFSL)
- $225M pessimistic purchase (assumes no technologies pushing disk other than Flash)
- Power 1.5MWatts

Miracle Needed!

Buying disk for capacity is reasonably priced but buying disk for bandwidth gets expensive fast!

Use MLC Based Shared Global Parallel File System to Provide Dump Space

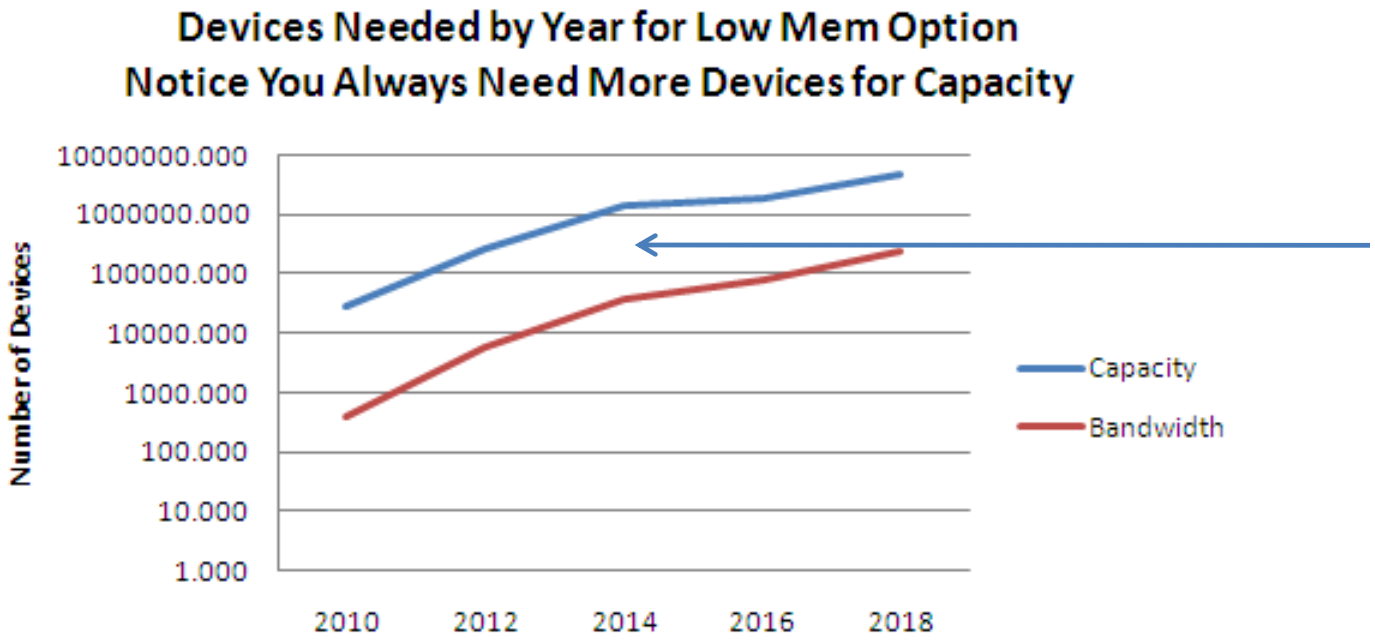

Notice that buying MLC for capacity is expensive but buying it for Bandwidth is cheaper

2018 medium memory machine

- 4166 IO nodes
- File System sees 50-100k way parallelism (assumes IOFSL)
- $625M pessimistic purchase (assumes no technologies pushing disk other than Flash) Miracle Needed!
- Power 2.5MWatts (have to buy so much to get capacity)

Hybrid Disk (Capacity)/SSD (Bandwidth)

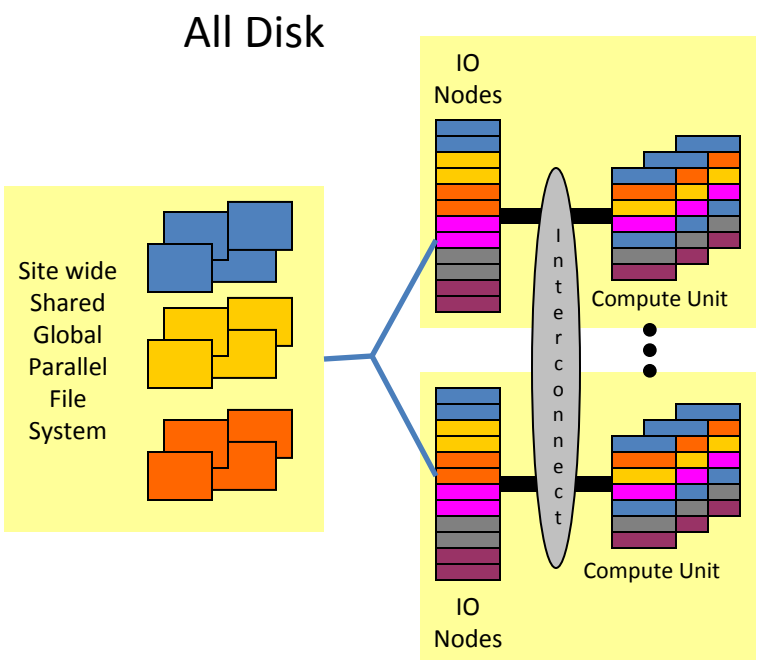

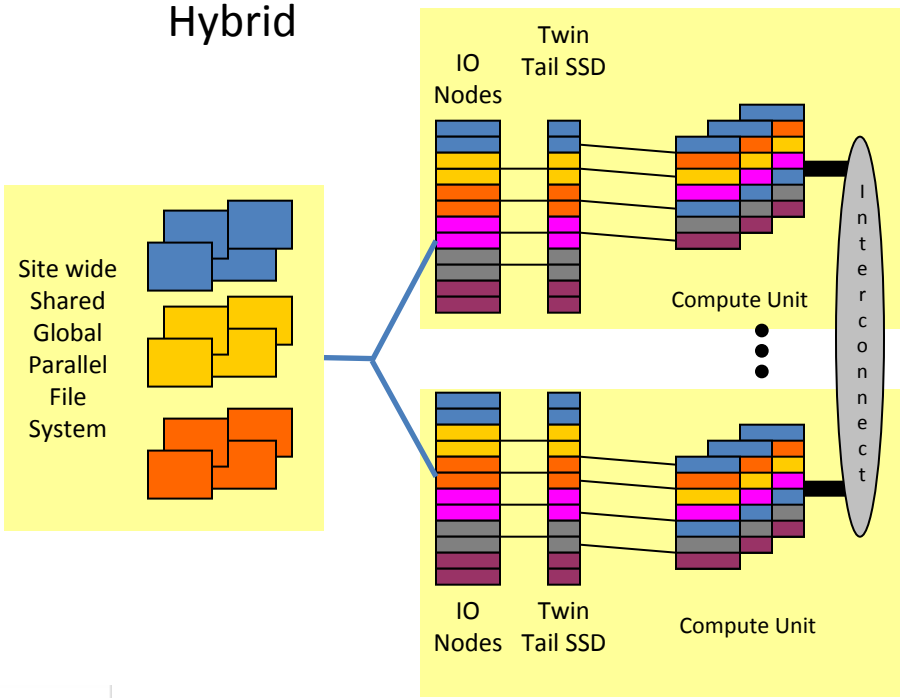

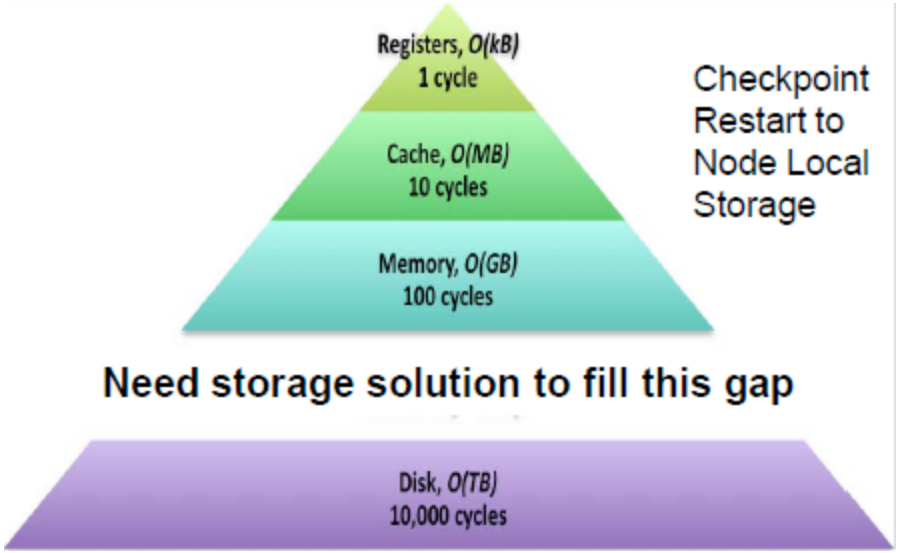

Must move checkpoint device closer to compute memory

- on node – has jitter issues
- at least near node is required
- Leads to Hybrid Storage model

Hybrid MLC burst / Disk Global

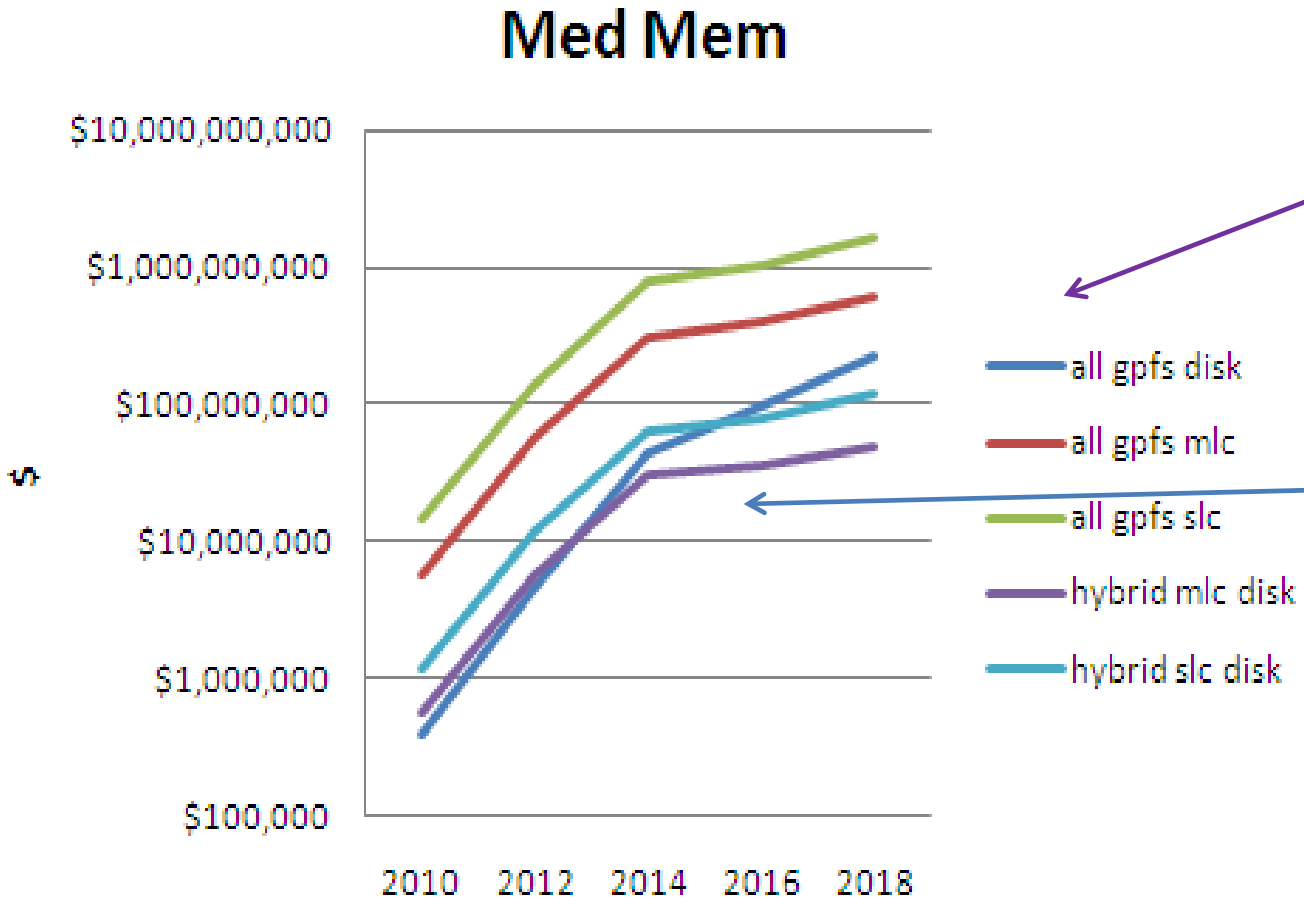

Hybrid wins big once we are in the regime of having to buy disk for bandwidth

All Global disk is cheapest now because we buy capacity

2018 med mem mach

- 416 IO Nodes, 20k disks not much of a stretch
- Disk FS sees modest parallelism assumes IOFSL/burstbuffer etc.)
- $60M pessimistic purchase - worst case (all migrated to disk and tech price)
- Power 2.2MWatts

Hybrid MLC burst / Disk Global

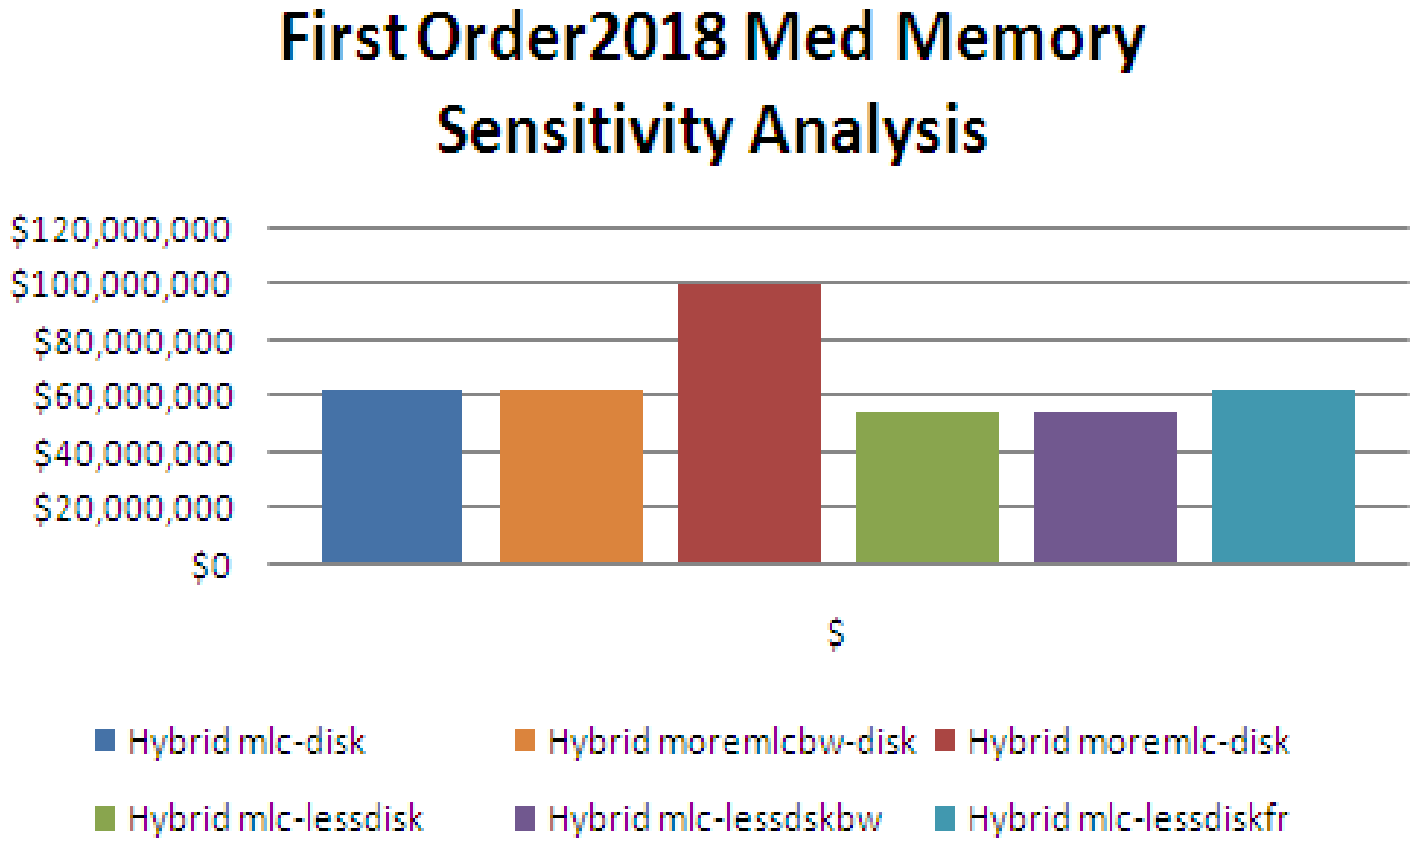

Cost Driver Sensitivity

- More MLC BW (free – capacity driver)
- More MLC Cap (costly – capacity driver)
- Less Disk Cap (small savings (MLC capacity driver)
- Less Disk BW (small savings controllers/ION etc. (MLC capacity driver)
- Less Frequent MLC to Disk (no savings, Disk Capacity Driver)

A Feasible Evolutionary Approach?

Summary: Issue	Action
Probably pretty close on storage densities, bandwidths, and costs, in fact it may be a bit conservative (maybe more than a bit)	Continue to update model
Based heavily on MTTI assumptions in the DARPA study and that study indicates a pretty large per socket improvement in MTTI without good substantiation	Get serious about measuring and predicting this!
Assumes that existing techniques like RAID or other redundant techniques will keep the burst buffer working often enough to not have issues without substantiation	Keep our eye on Flash reliability – prospects are good given wide use
Assumes existing RAS techniques for file systems will be able to keep up without substantiation	Keep our eye on this
Have to have burst buffer so we will need software to manage MLC burst buffer, with bleed to global disk	SCR LLNL / PLFS LANL / ADIOS ORNL / MPI-IO ANL. Zest PSC, …
Assumes flattening to get high % of peak on disks (like log structure)	PLFS LANL / ADIOS ORNL / MPI-IO ANL, Zest PSC, …
Need a way to deal with large numbers of files	Giga+, etc.

Maybe we can get to Exascale with evolution only, but it would be pretty sad if we didn’t also attempt some more fundamental revolutionary approaches!

We need both an evolutionary track and a revolutionary track!

Archive Analysis

Can we Afford an Archive?

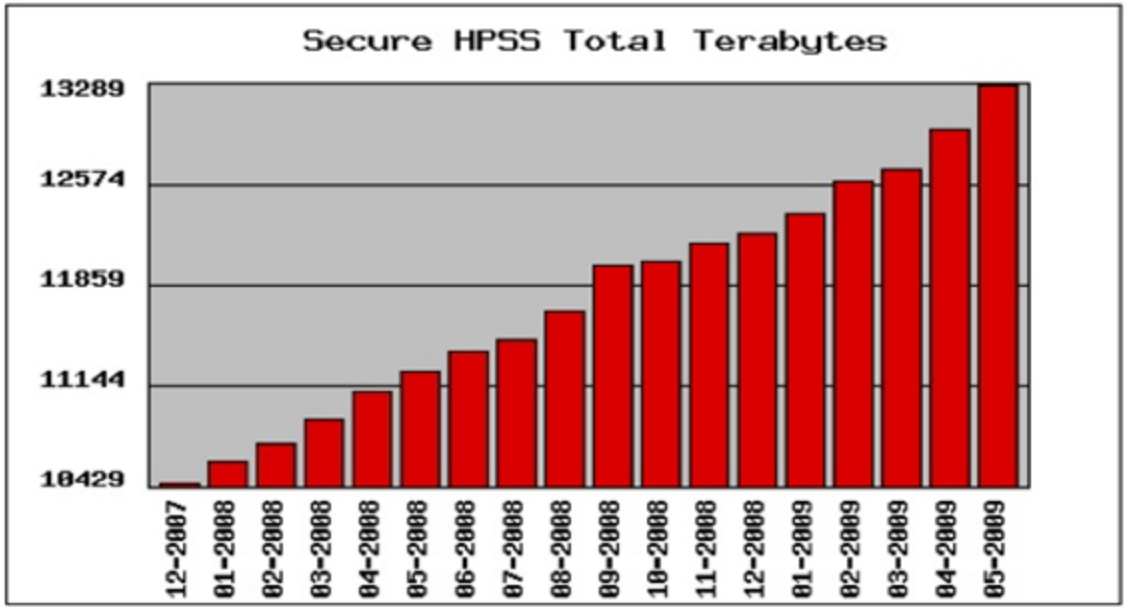

- Unlimited archive will become cost prohibitive
- Past method of using bandwidth to archive as rate limiter may not be adequate going forward

Archive Growth Depends on TB of Memory on the Compute Floor

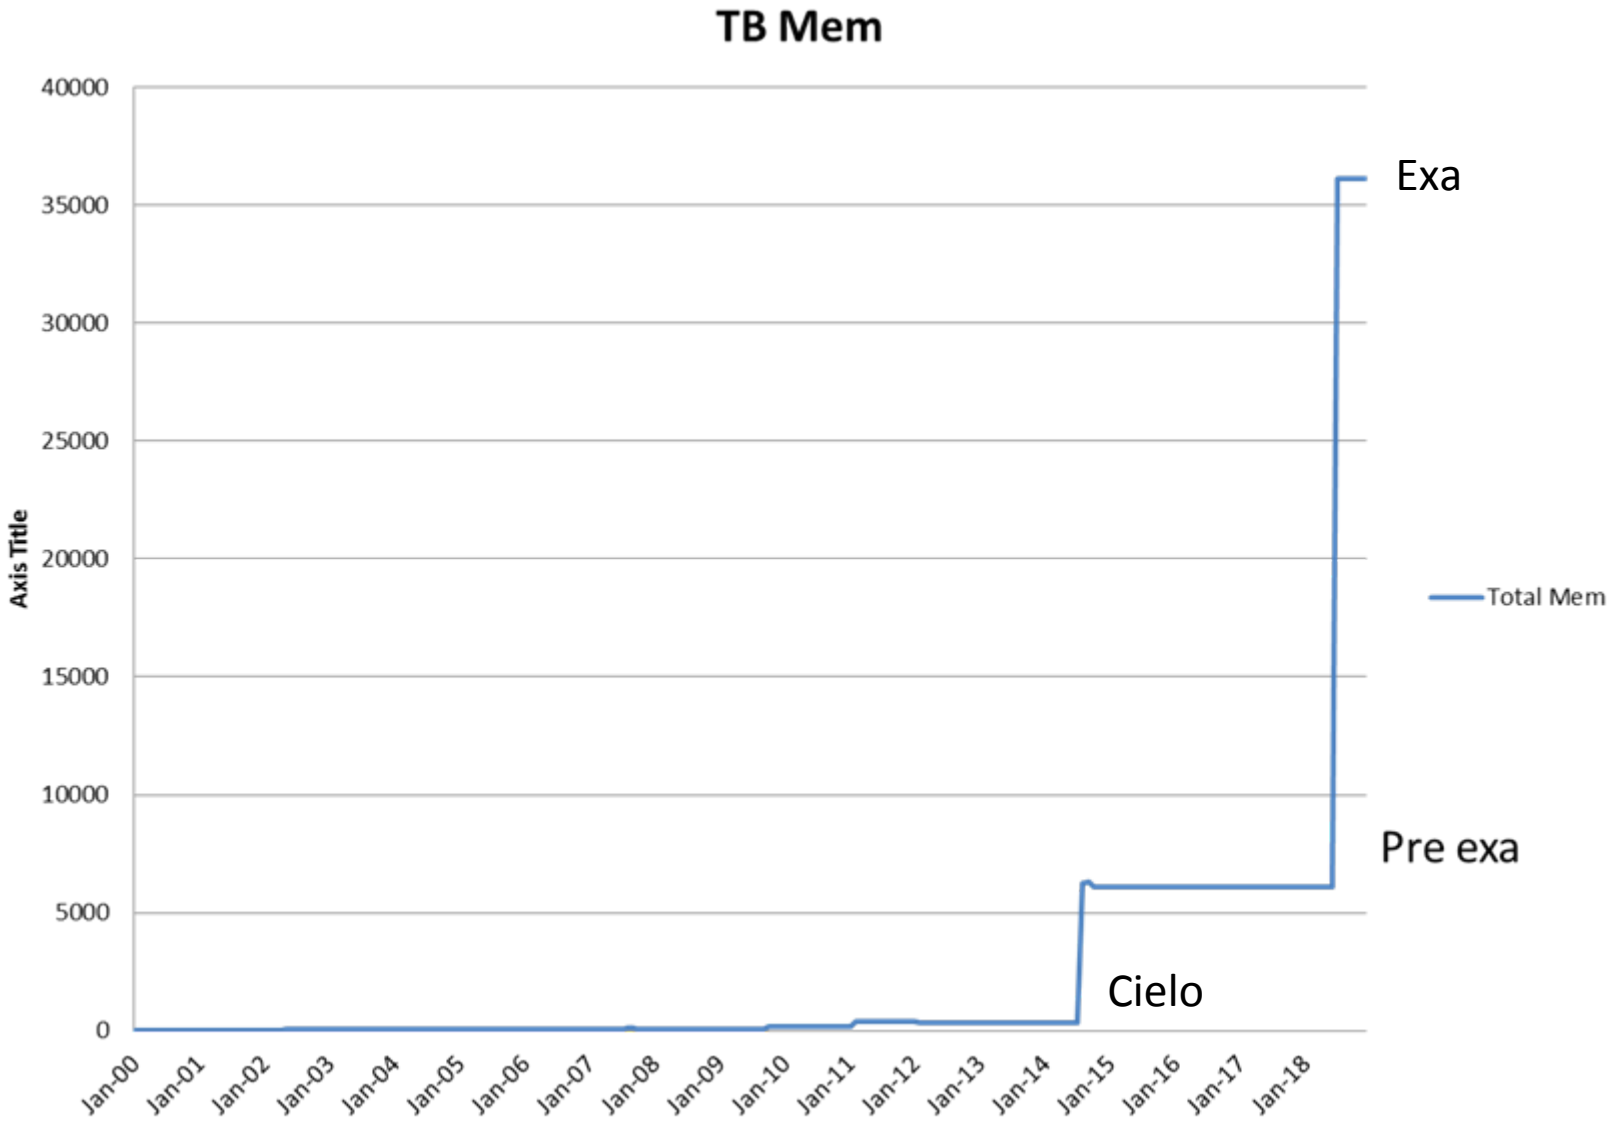

Archive Growth TB

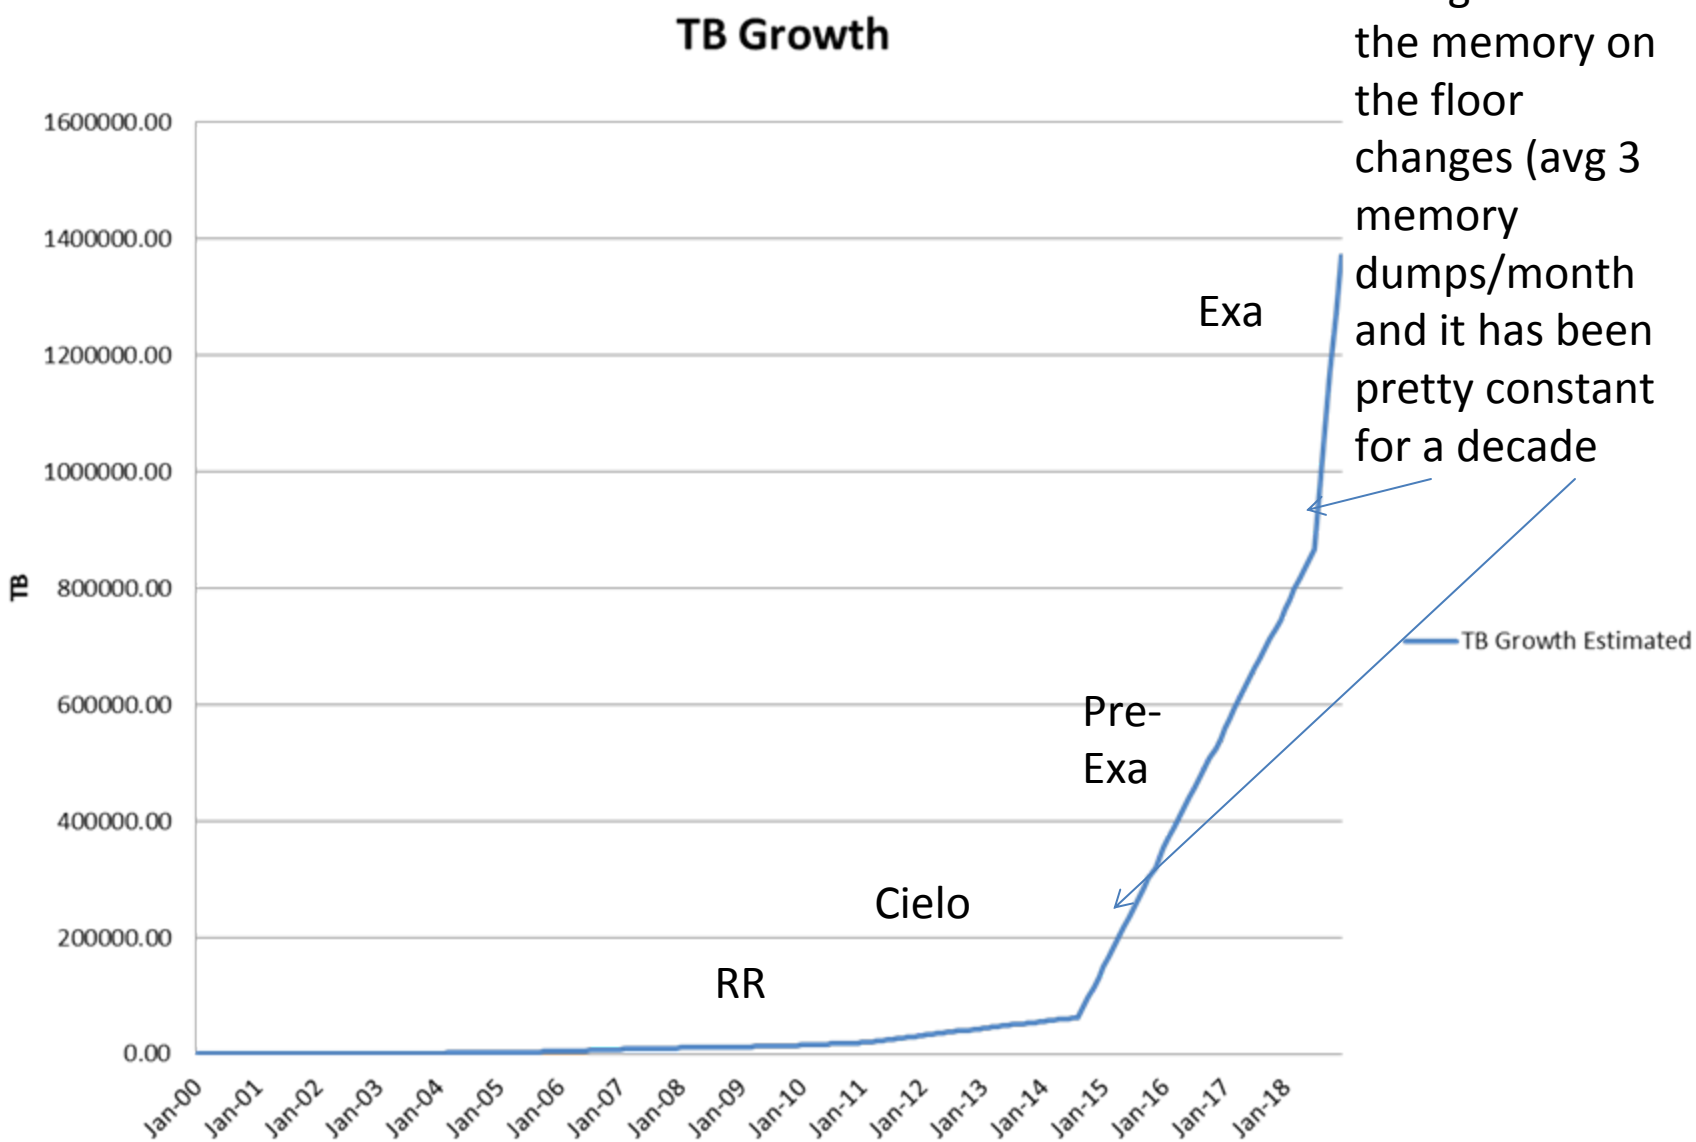

Notice the slope changes when the memory on the floor changes (avg 3 memory dumps/month and it has been pretty constant for a decade

Effective Cartridge Density Considering 3 Generations of Technology

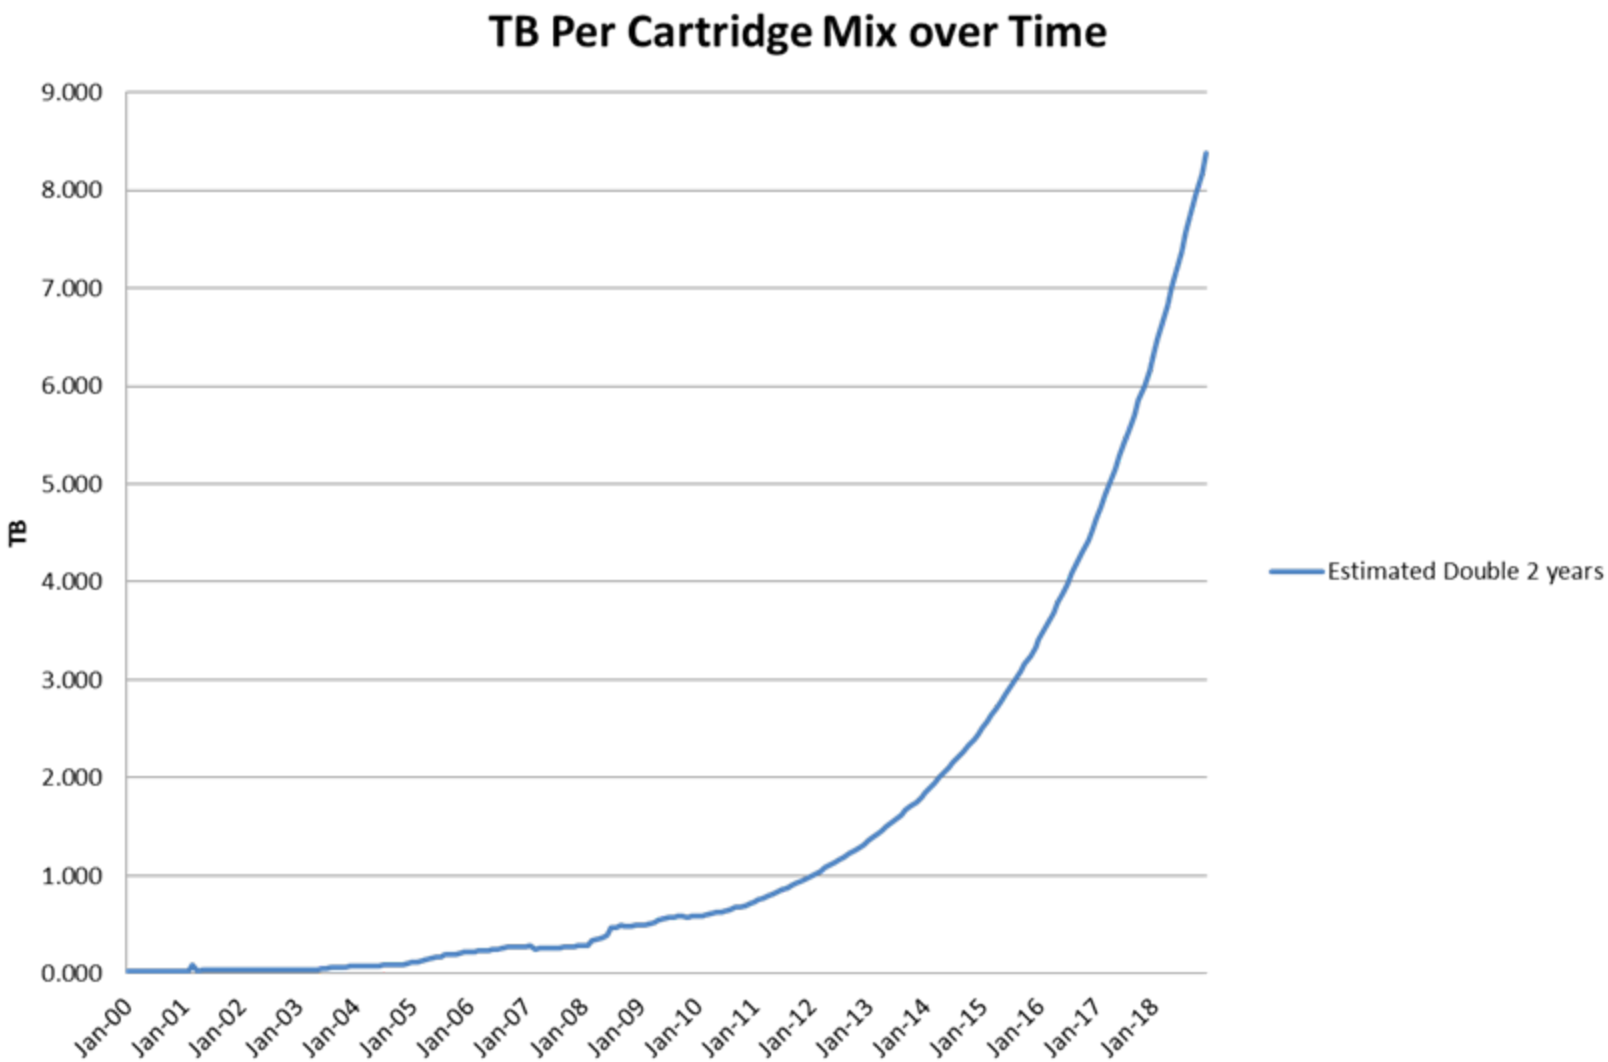

Cartridge Growth (new data and shrink data on latest cart tech)

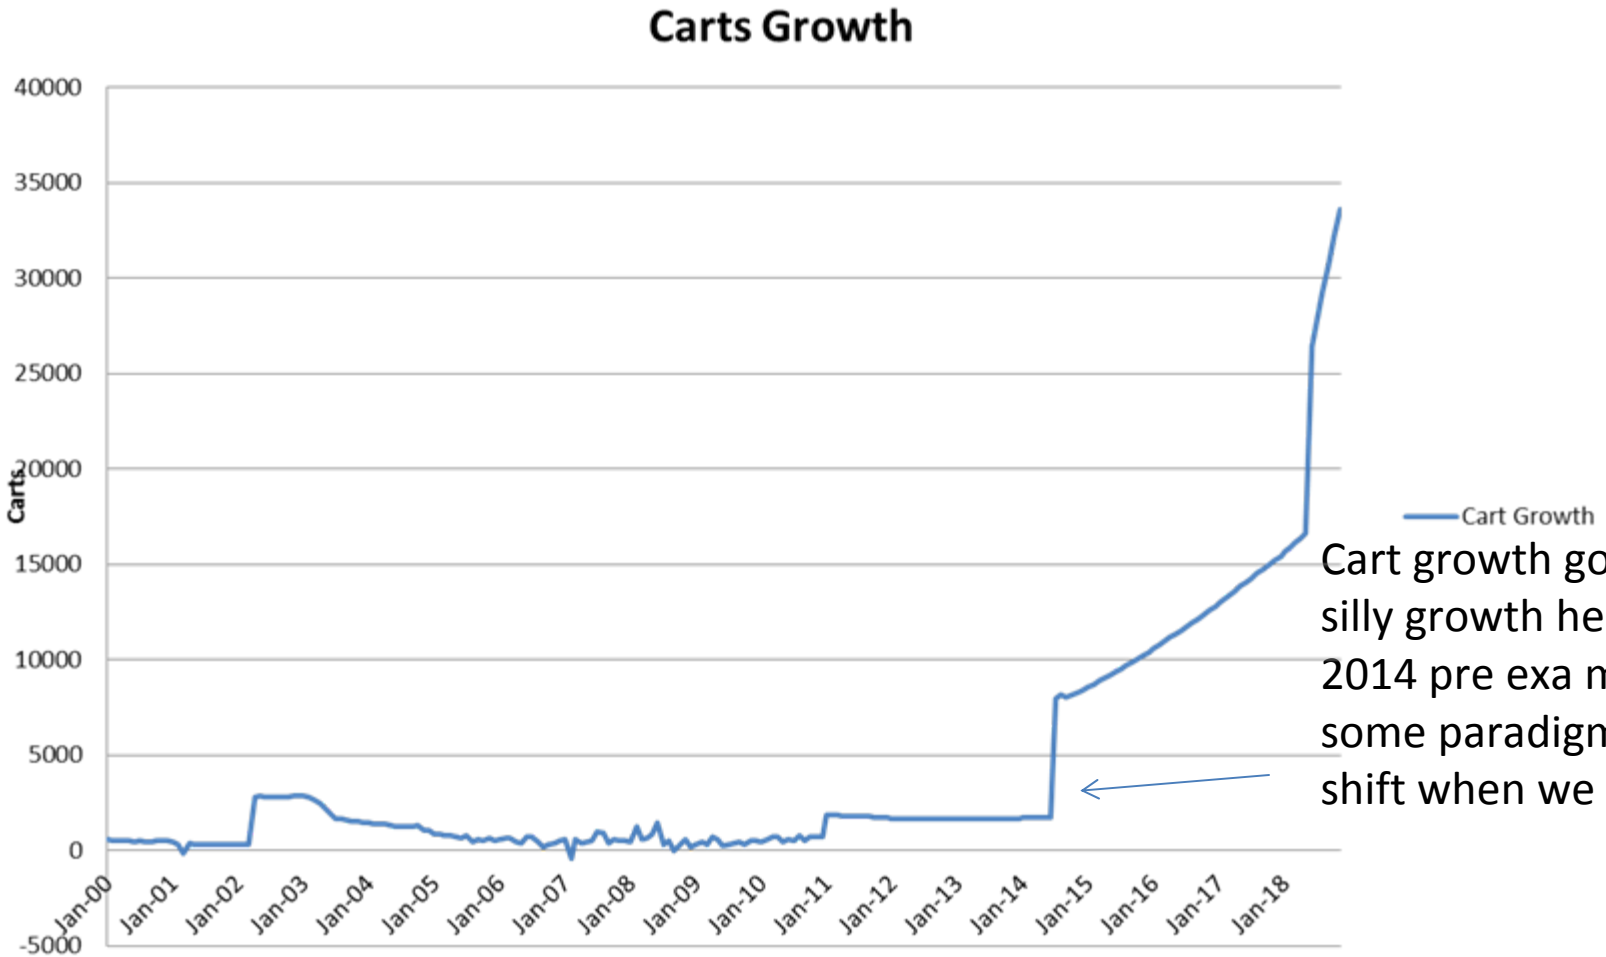

Cart growth goes into a silly growth here at 2014 pre exa machine, some paradigm has to shift when we get here

Yearly $ on Carts

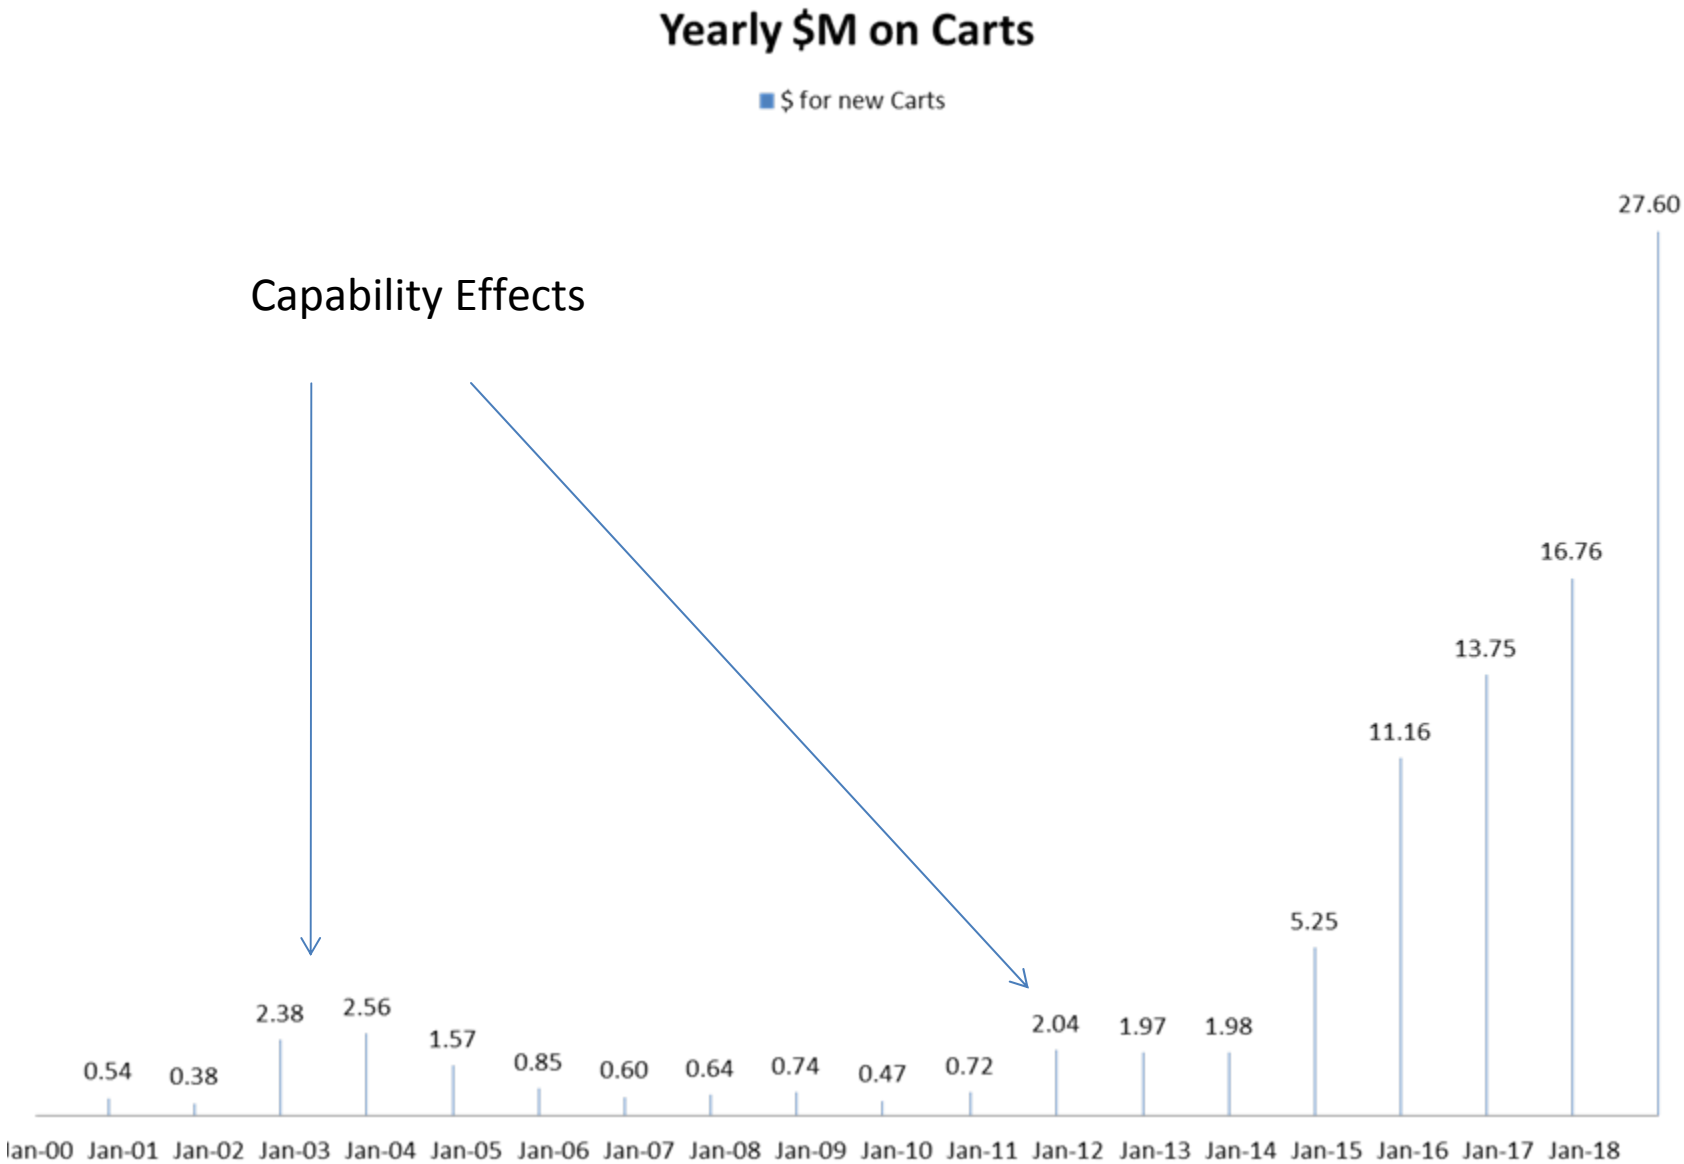

Total Carts on Hand

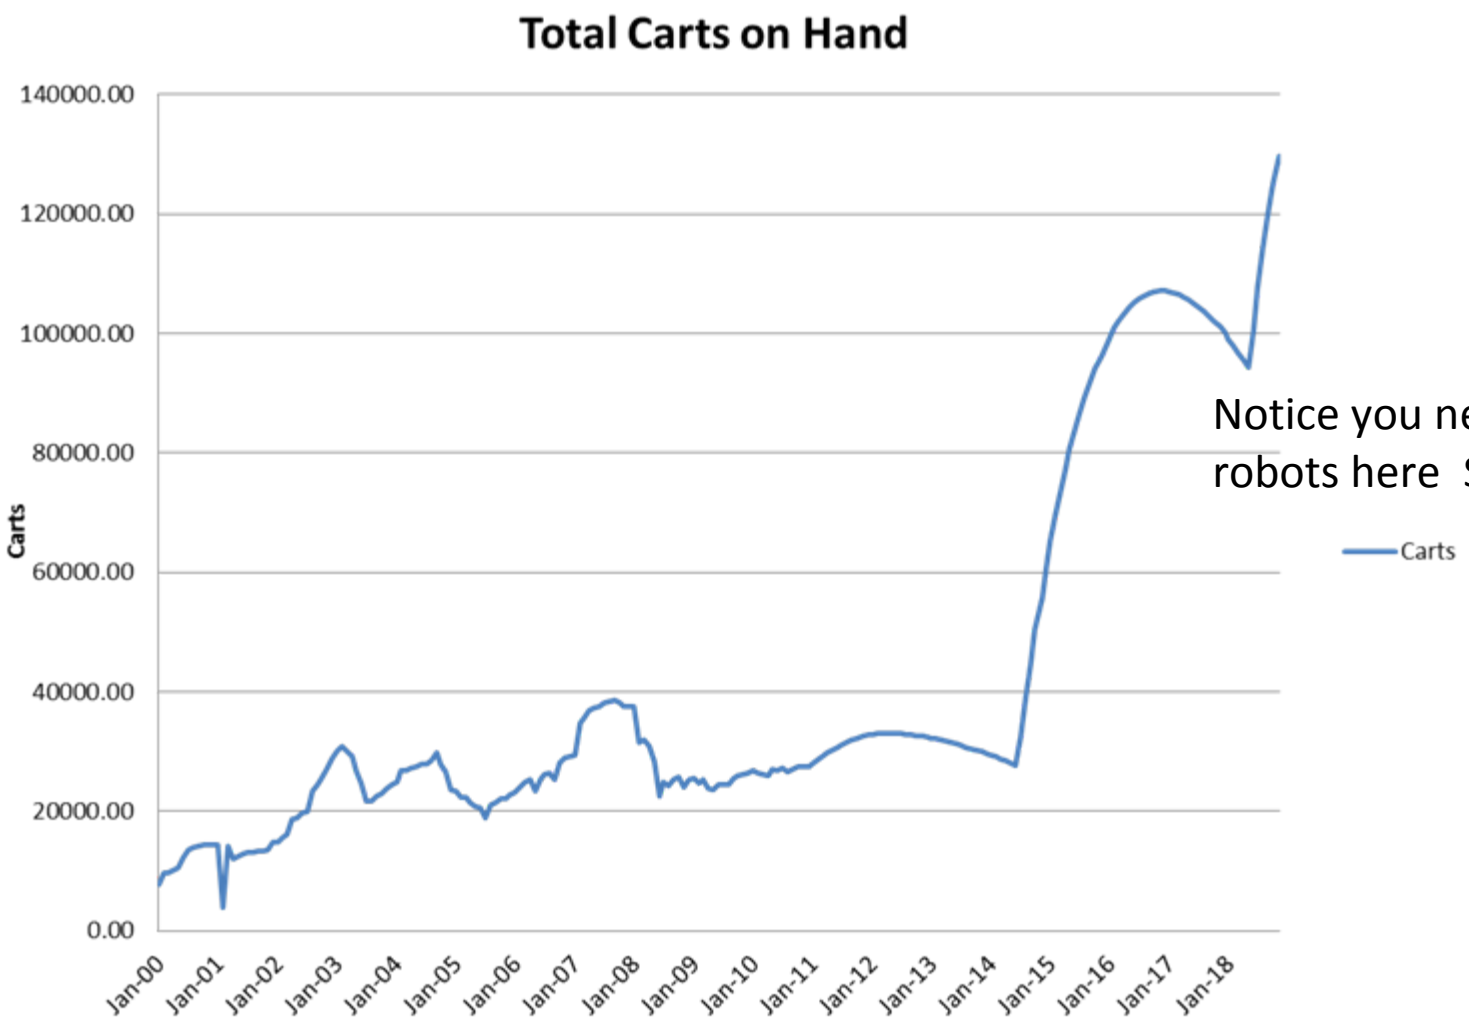

Notice you need new robots here $$$

PRObE

An NSF large scale systems research center in Los Alamos, New Mexico

http://www.newmexicoconsortium.org/probe

LANL was going to trash this!

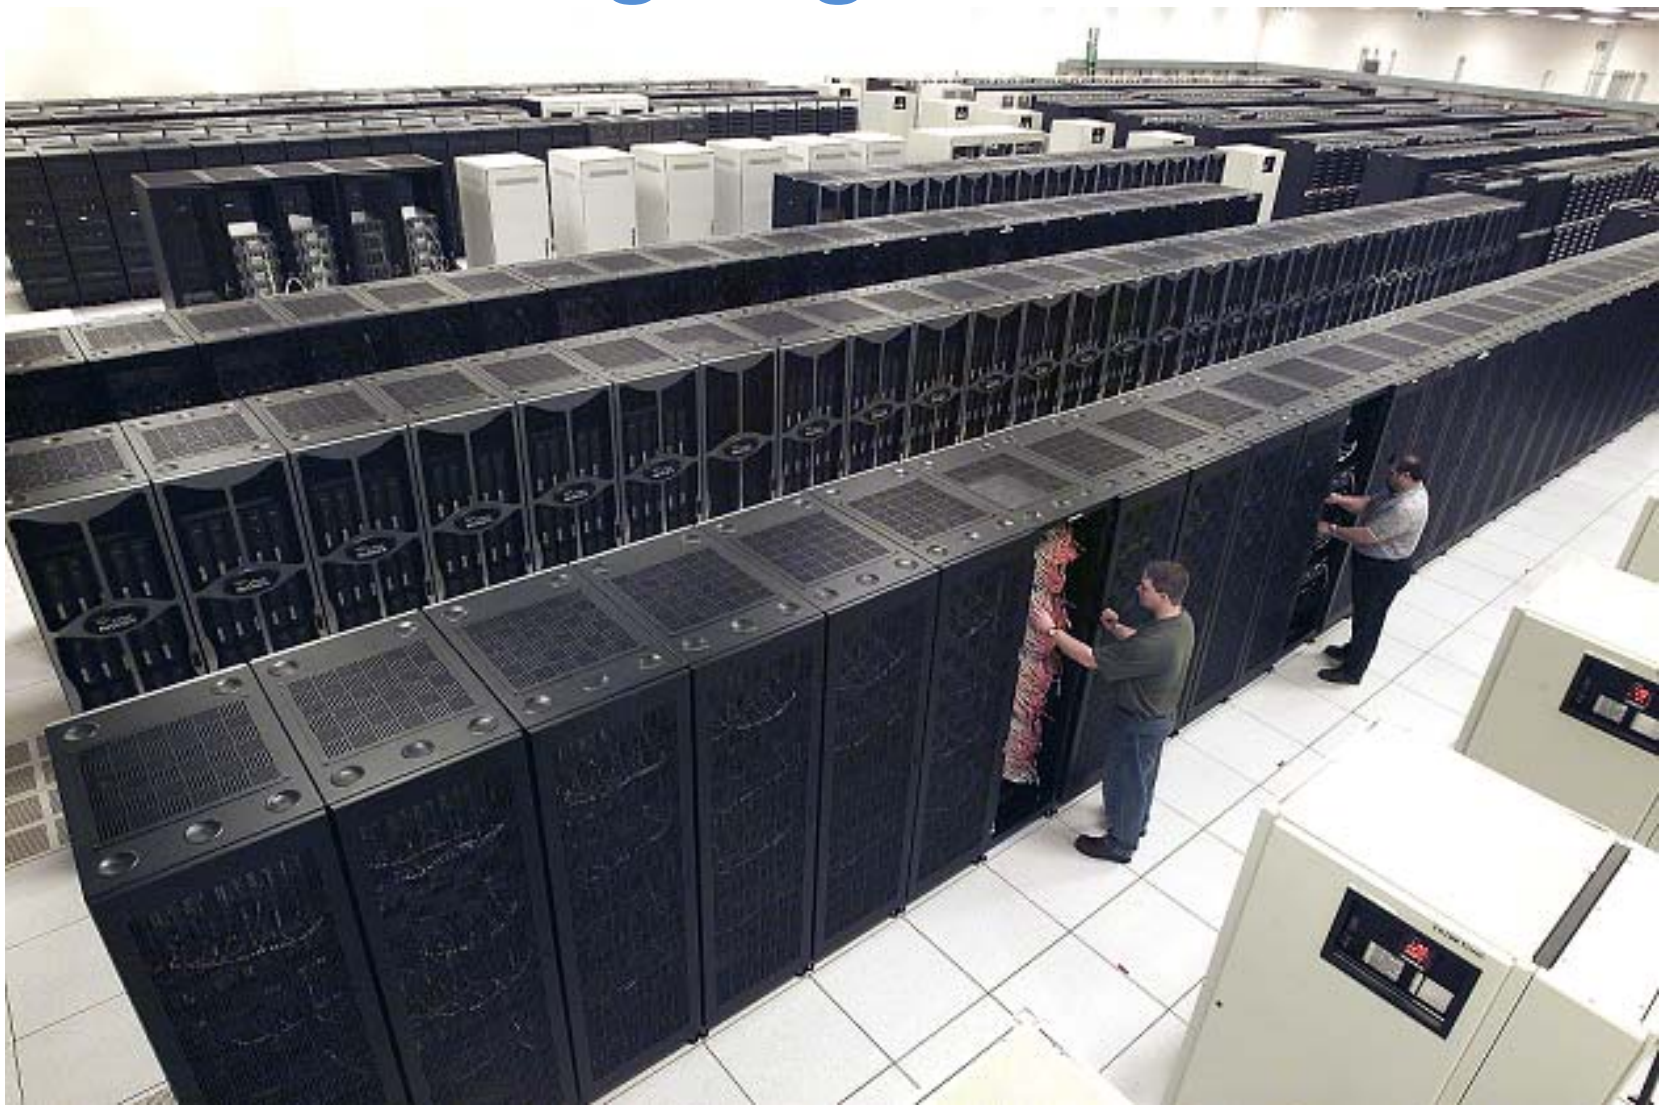

PRObE to the rescue!

- NSF Funds the New Mexico Consortium (NMC) to bring LANL supercomputers back to life
- PRObE –

Parallel **R**econfigurable

Observational **E**nvironment

Motivation

- Systems research community lacks very *large* dedicated resource for experiments, fault injection, and hardware control.
- Research on large compute resources often constrained by imposed software stack
- Large systems are hurried through testing phase into production. Inhibits systems research at scale.
- And…

What is PRObE?

- Low level systems research center
- Days to weeks of dedicated usage of a large computer resource for projects
  - **Physical** and remote access
- Complete control of hardware and software
- Enables fault injection and failure statistics collection
- End-of-life destructive testing
- Supports parallel and data intensive workloads

Brought to you by:

New Mexico CONSORTIUM

NSF

Carnegie Mellon University

emulab

Los Alamos NATIONAL LABORATORY EST. 1943

THE UNIVERSITY OF UTAH

For Systems Research Users

- NFS's "who can apply" rules
  - Includes international and corporate research projects (partnership with US university preferred)

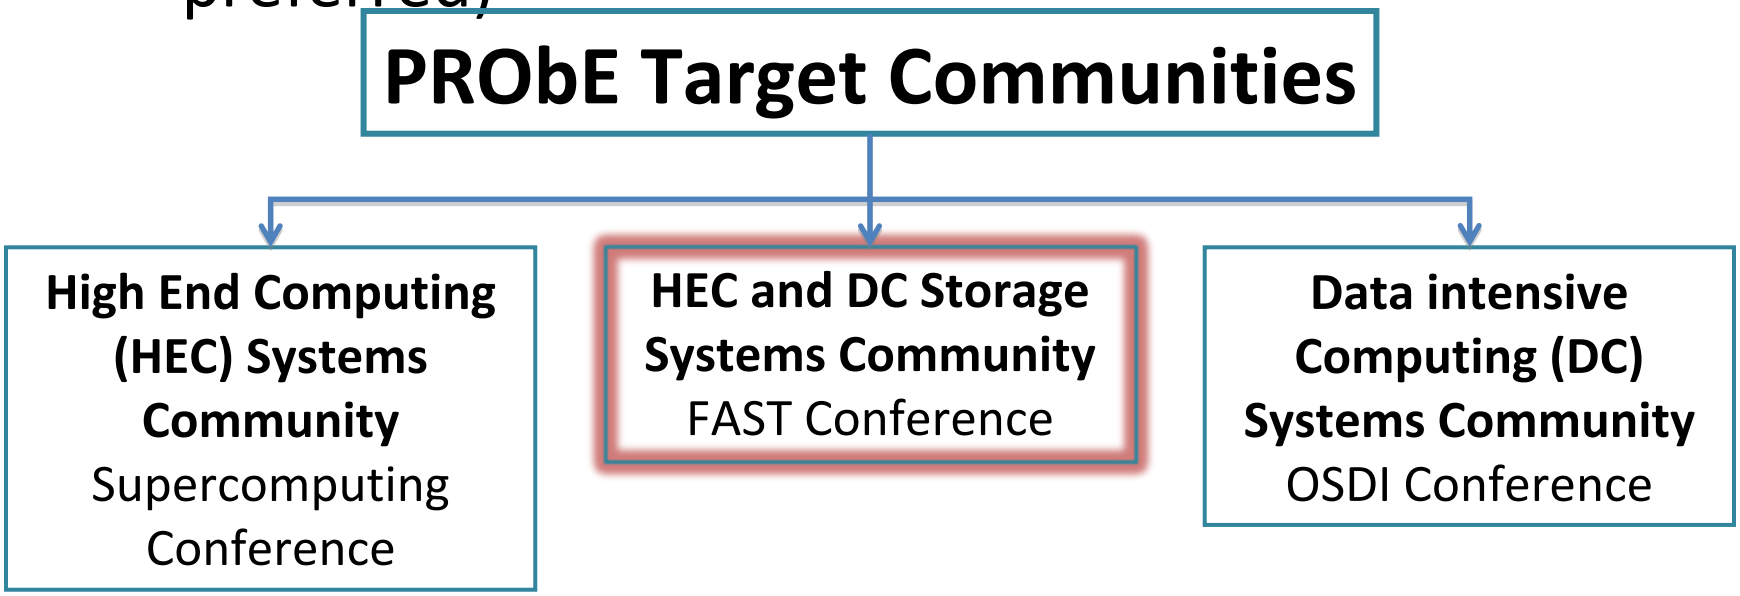

PRObE Decision Making

3 Committees, members selected from community

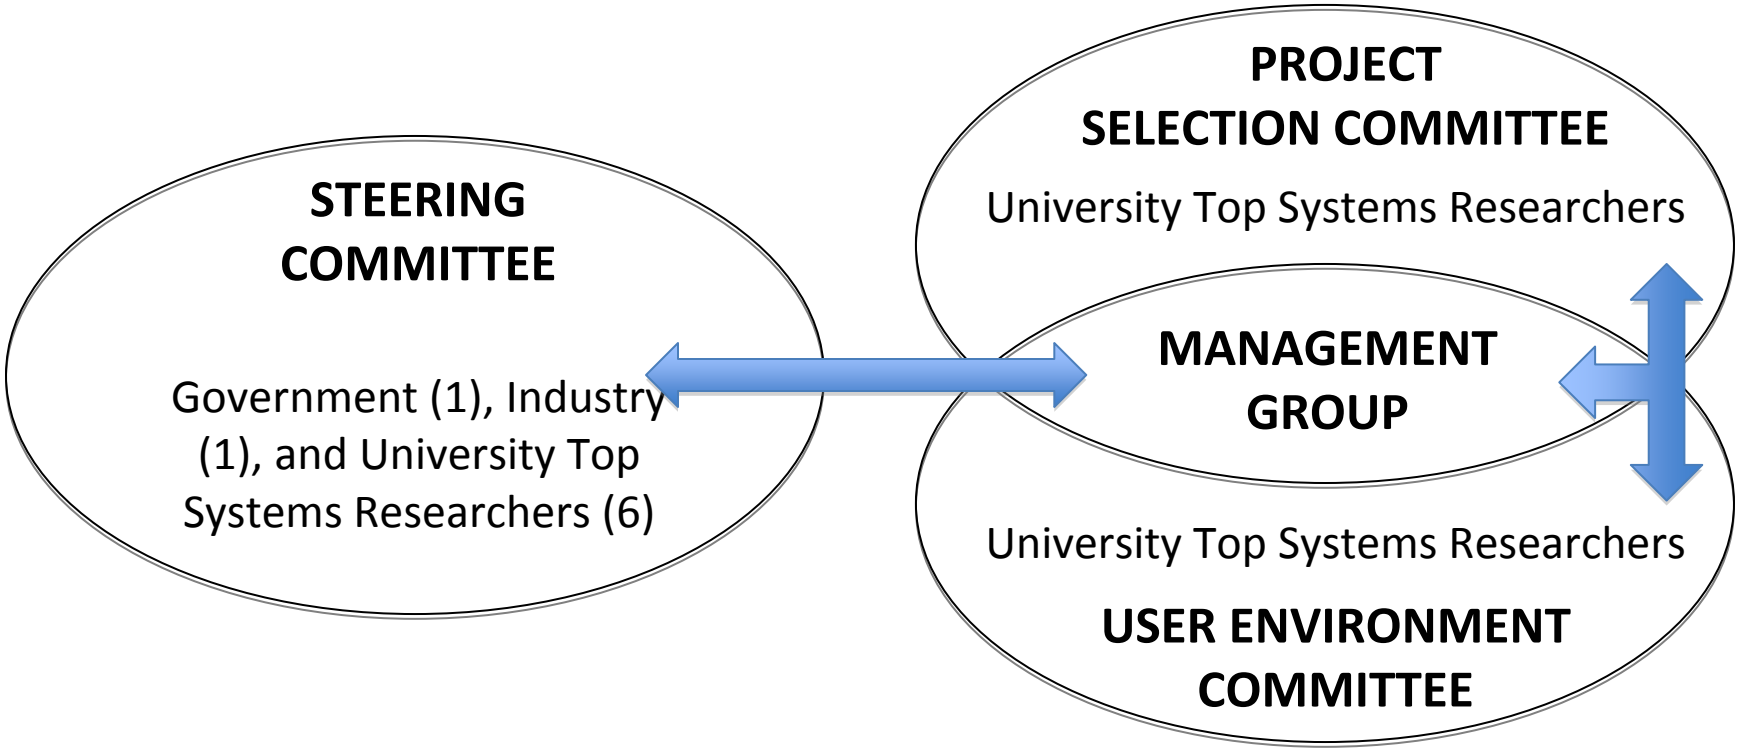

Software

- First, “none” is allowed
  - Researchers can put any software they want onto the clusters
  - Full OpenCirrus stack possible
- Second, a well known tool managing clusters of hardware for research
  - Emulab (www.emulab.org), Flux Group, U. Utah
  - Widely used in academic systems community
  - Enhanced for PRObE hardware, scale, networks, resource partitioning policies, remote power and console, failure injection, deep instrumentation

Cluster Installation Timeline

When	Nodes	Cores	Purpose / Type	Where	Name
Q1 CY2011	128	256	Front end test cluster (IB)	CMU	Marmot
Q3 CY2011	128	256	Front end (Myri)	NMC	Denali
Q3 CY2011	36	1728	High core count cluster (IB)	CMU	Susitna
Q4 CY2011	1024	2048	High node count cluster (Myri)	NMC	Sitka
Q1 CY2012	1024	2048	High node count cluster (IB)	NMC	Kodiak
Q3 CY2013	16	128	Front end (IB)	NMC	Yakutat
Q3 CY2013	200	1600	High node count cluster (IB)	NMC	Nome
Q4 CY2013	36	3456	High core count cluster (100GigE)	CMU	Matanuska
Q2 CY2014	Next high node count cluster identified and…				
..first 1024 node cluster decommissioned to make room for next large cluster. Research contest to see how best to torture the machine on its way out will be conducted.					

Contacts

- Website
  - http://www.newmexicoconsortium.org/probe
    - Will soon house: Wiki's, Published data Committee Nomination & Election pages
- Email
  - probe@newmexicoconsortium.org